

NEW VIGIFLAM Vi[®]

FLAMELESS FOR BUCKET ELEVATOR & CONVEYORS



- Compact design
- Optimized weight
- ATEX EN 16009


DIMENSIONS:

170x470 - 180x420 - 205x610 - 270x458
305x610 - 350x650 - 490x590

Flameless VIGIFLAM Vi



VIGIFLAM Vi®

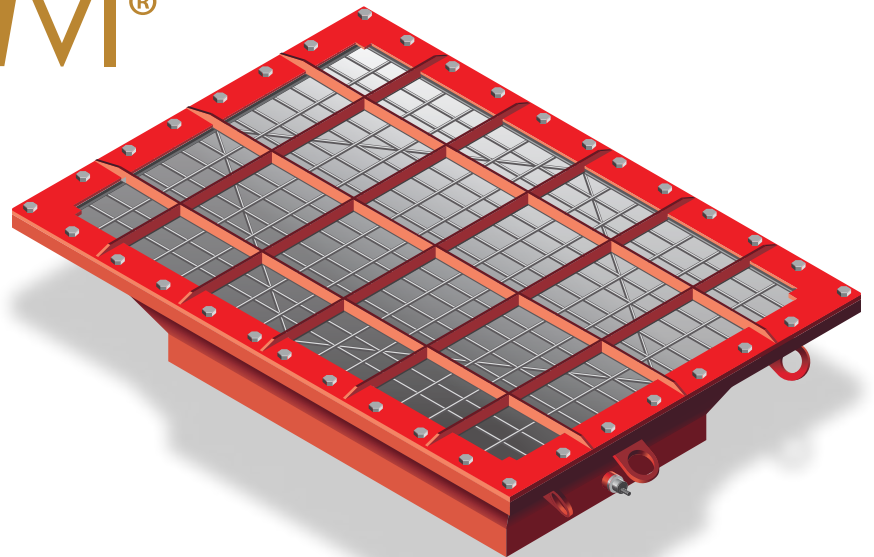

GENERAL DIMENSIONS

VIGIFLAM Vi	NOMINAL PANEL SIZE		NOMINAL PANEL AREA		WEIGHT	FIXING BOLT
	(mm)	Pouces	m ²	sq ft	kg	Nbr
170 x 470	170 x 470	7 x 19	0.0799	0.845	29	16 M10
180 x 420	180 x 420	7 x 17	0.0756	0.795	28	16 M10
205 x 610	205 x 610	8 x 24	0.1251	1.320	38	20 M10
270 x 458	270 x 458	11 x 18	0.1237	1.315	40	18 M10
305 x 610	305 x 610	12 x 24	0.1861	1.980	55	22 M10
350 x 650	350 x 650	14 x 26	0.2275	2.420	67	22 M10
490 x 590	490 x 590	19 x 23	0.2891	3.085	80	26 M10

TECHNICAL INFORMATION

VIGIFLAM Vi


Kst max ≤ 200

Pmax: 9,4 bar

Pred: 1 bar

Pstat ≤ 0,1 bar (±20%)

**THE VIGIFLAM Vi
HAS 50% LESS VOLUME THAN
THE VIGIFLAM VQ**

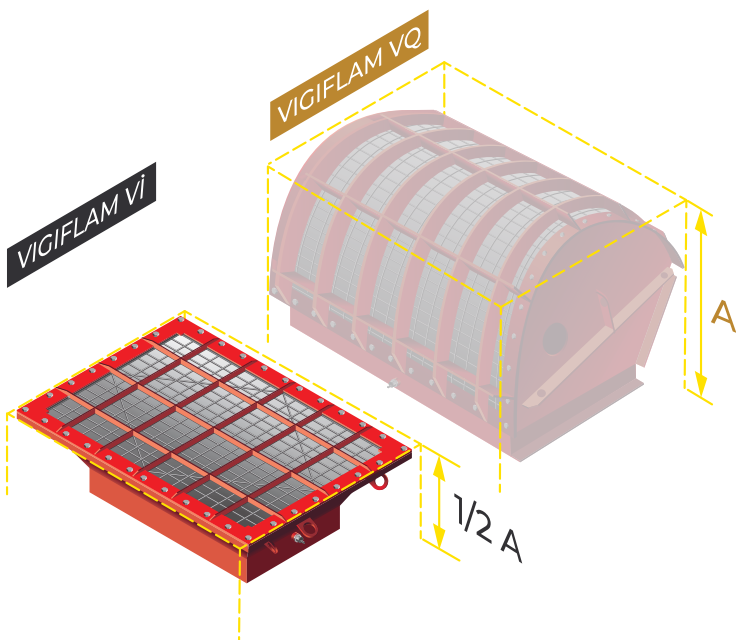

CERTIFICATIONS

Ex II D

EN 16009

EC Certificate:
GEX 24ATEX 1036X

Production quality assurance notification:
INERIS 08ATEXQ406

CERTIFIED FOR:

- Organic dust
- Fiber dust