

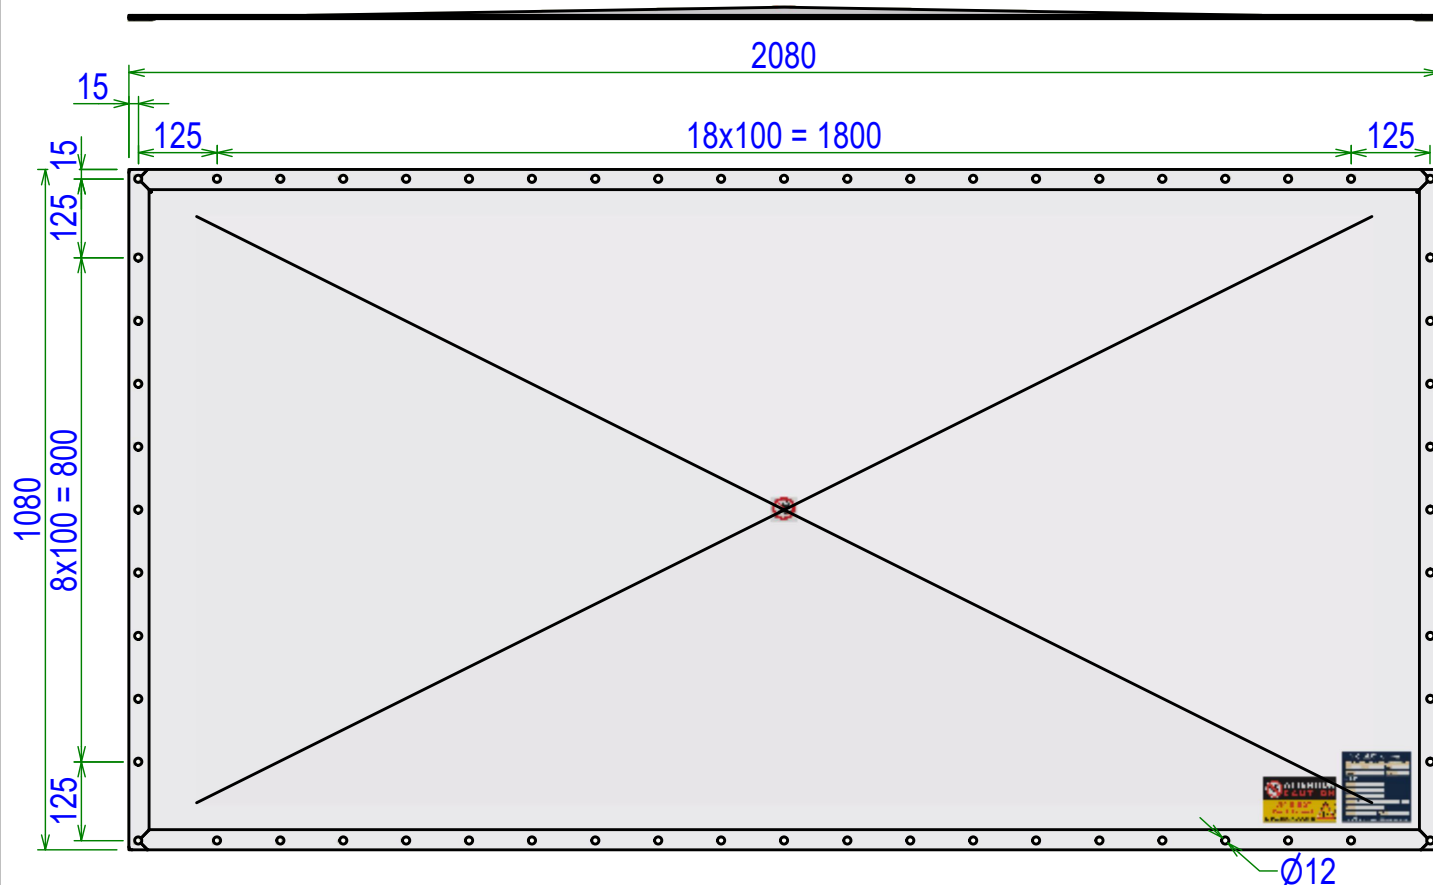


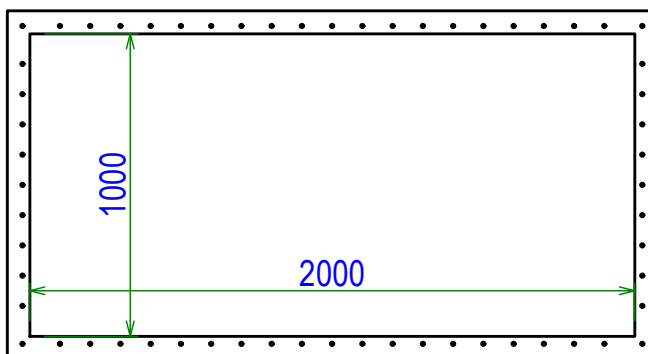

ATEX II GD - INERIS15ATEX0001X
Pstat : < 500 mbar
Pstat standard : 100 mbar +/-15% @22°C
Max vacuum : 5 mbar pour / for Pstat 100 mbar
Surface / Area: 19 940 cm²
Kst : dp/dt < 500 bar/s
Kg : dp/dt < 130 bar/s
Pmax < 12 bar / Pred. max < 1.8 bar
- Inox 304L / stainless steel 1.4306
- Inox 316L / stainless steel 1.4404
- Joint / gasket EPDM Temp: -40...+80° C
- Joint / gasket SILICONE FDA Temp: -60..+200° C



C	Maj Note	17/09/2024	AV	MJ	
Ind.	Objet de la modification		Date	Nom	Vérif.
		Matière:	Poids/Weight: 13,66 kg	Ech : s/e	
Clt	Plan n°: 57VL_100200_Clt			Date de création 23/06/2022	
Désignation:					Suivi ATEX: RC
VIGILEX VL 1000x2000					