



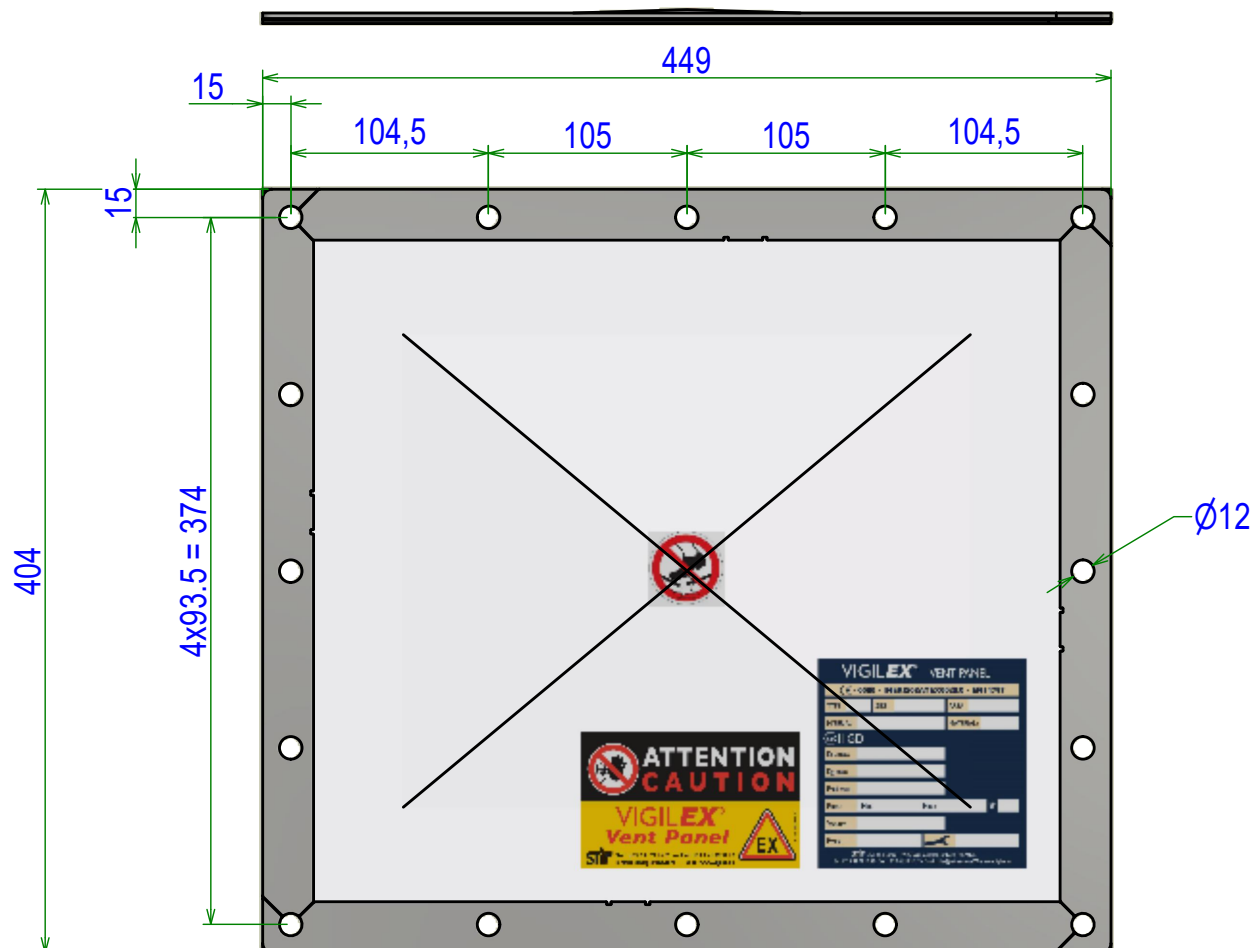

ATEX II GD - INERIS15ATEX0001X
Pstat : < 500 mbar
Pstat standard : 100 mbar +/-15% @22°C
Max vacuum : 50 mbar pour / for Pstat 100 mbar
Surface / Area: 1290 cm²
Kst : dp/dt < 500 bar/s
Kg : dp/dt < 130 bar/s
Pmax < 12 bar / Pred. max < 1.8 bar
- Inox 304L / stainless steel 1.4306
- Inox 316L / stainless steel 1.4404
- Joint / gasket EPDM Temp: -40...+80° C
- Joint / gasket SILICONE FDA Temp: -60...+200° C

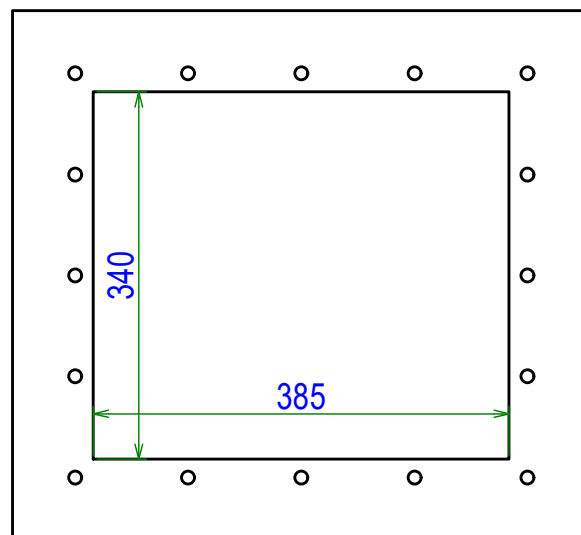

Poids unitaire / Unit Weight :
1,780 kg

C	Modification brides	24/07/2023	AV	MJ
Ind.	Objet de la modification	Date	Nom	Vérif.
STIF	Matière:	Date de création: 29/03/2022	A4	Ech.: s/e
Plan n°: 57VL_034038_Clt				
Désignation:				
VIGILEX VL 340x385				