


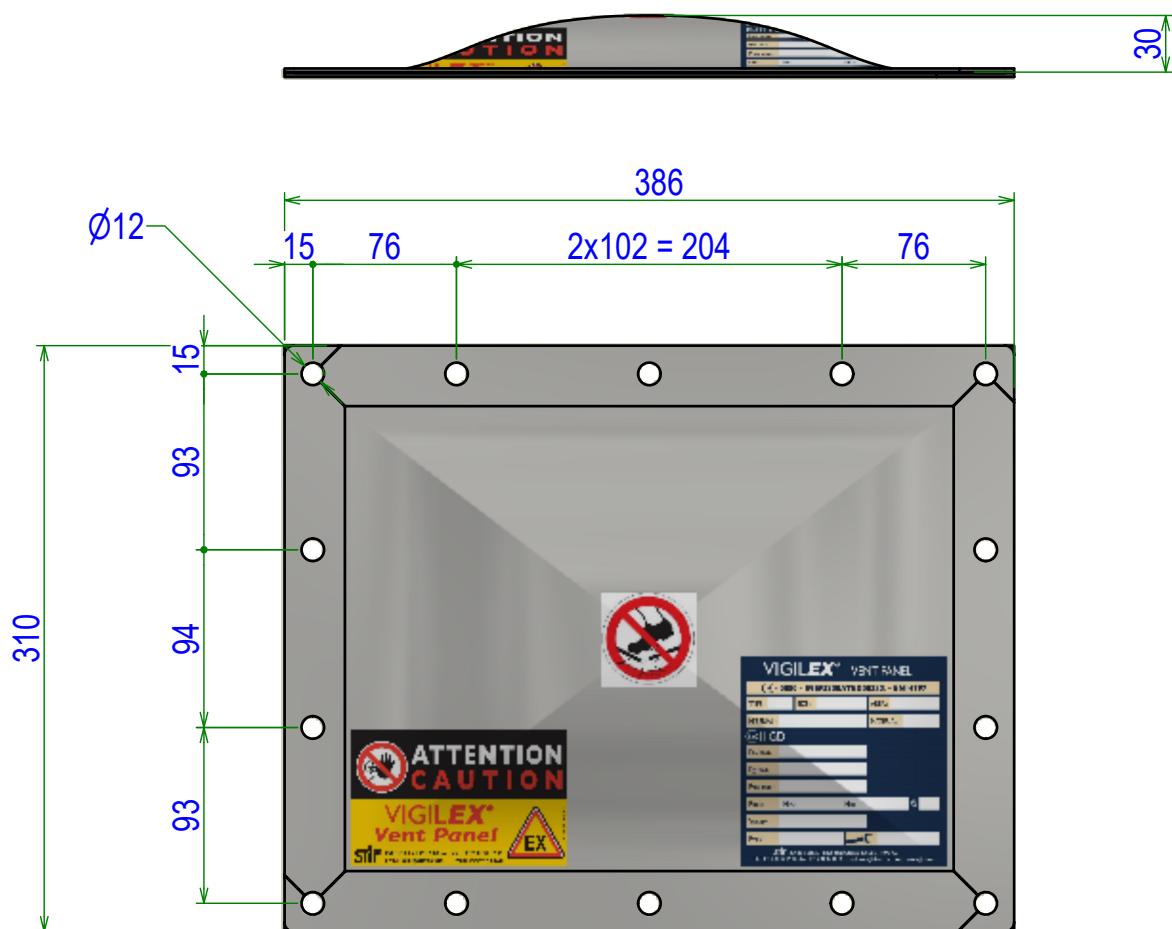

ATEX II GD - INERIS15ATEX0001X

Pstat : < 500 mbar

Pstat standard : 100 mbar +/-15% @22°C

Max vacuum : 200 mbar pour / for Pstat 100 mbar

Surface / Area: 690 cm²

Kst : dp/dt < 500 bar/s

Kg : dp/dt < 130 bar/s


Pmax < 12 bar / Pred. max < 1.8 bar

- Inox 304L / stainless steel 1.4307

- Inox 316L / stainless steel 1.4404

- Joint / gasket EPDM Temp: -40...+80° C

- Joint / gasket SILICONE FDA Temp: -60...+200° C

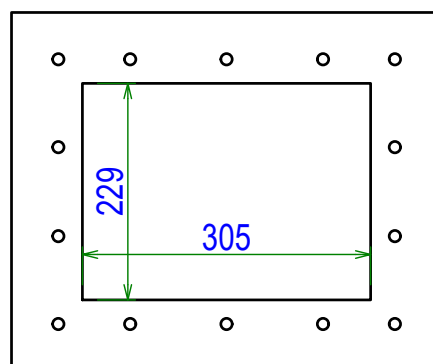

C	MAJ annotation		09/04/2024	AV	MJ
Ind.	Objet de la modification			Date	Nom
		Matière:	Poids/Weight: N/A	Ech : s/e	
Clt	Plan n°: 57VD_023030_Clt				Date de création: 07/12/2012
Désignation:					Suivi ATEX: RC
VIGILEX VD 229x305					