


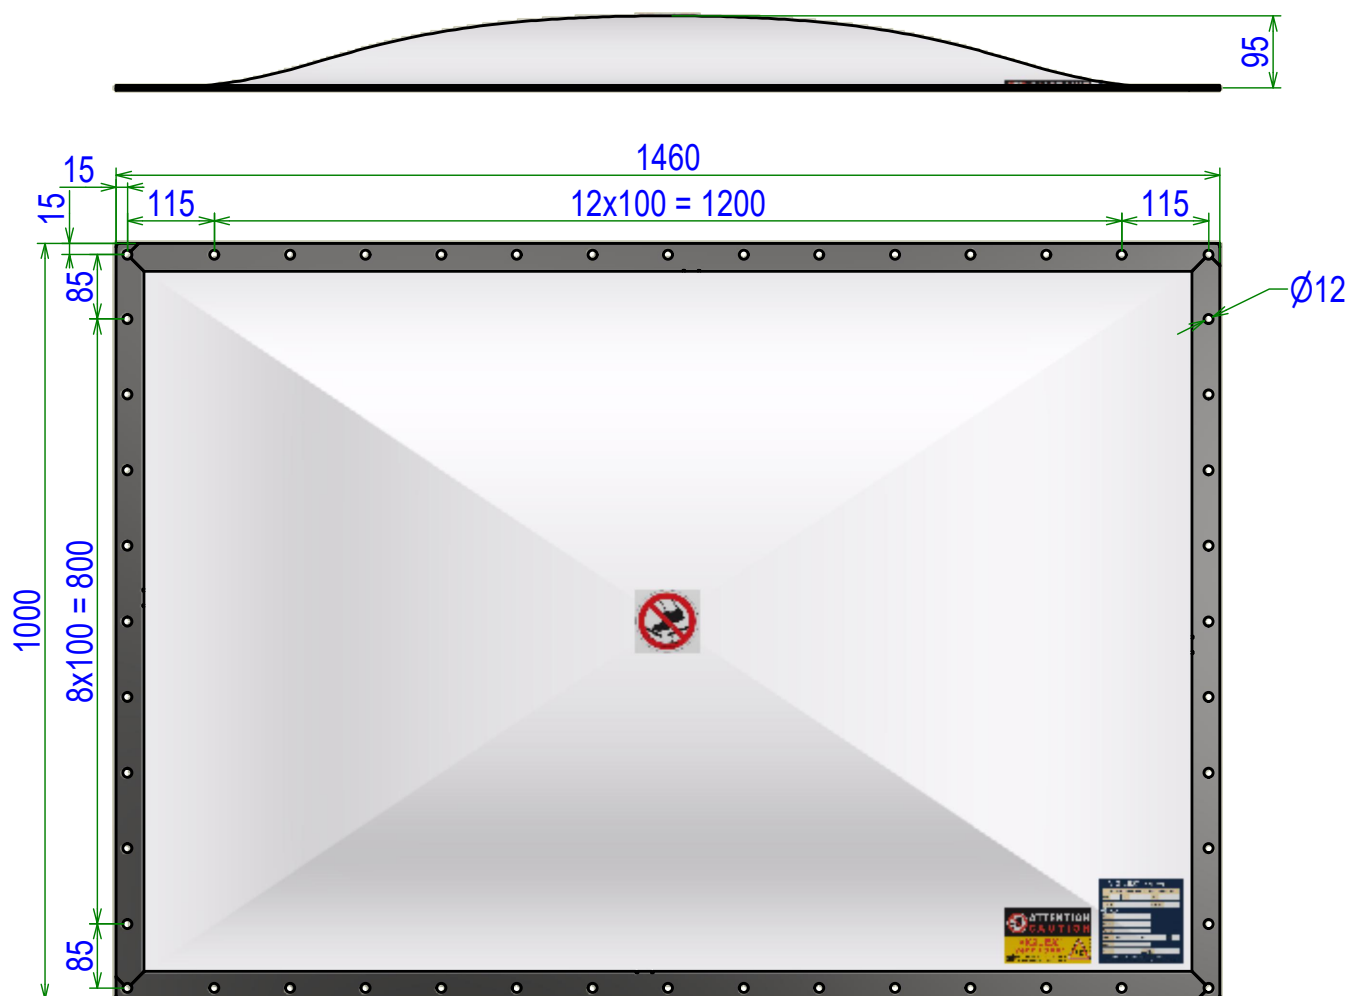

ATEX II GD - INERIS15ATEX0001X

Pstat : < 500 mbar

Pstat standard : 100 mbar +/-15% @22°C

Max vacuum : 200 mbar pour / for Pstat 100 mbar

Surface / Area: 12 650 cm²

Kst : dp/dt < 500 bar/s

Kg : dp/dt < 130 bar/s


Pmax < 12 bar / Pred. max < 1.8 bar

- Inox 304L / stainless steel 1.4307

- Inox 316L / stainless steel 1.4404

- Joint / gasket EPDM Temp: -40...+80° C

- Joint / gasket SILICONE FDA Temp: -60...+200° C

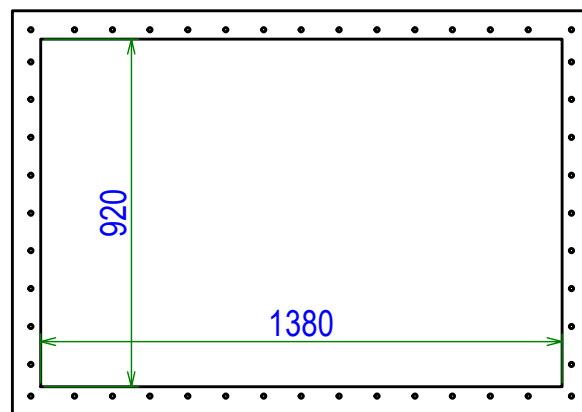

Poids net / Unit weight : 18,310 kg

A	Création	26/07/2022	AV	MJ
Ind.	Objet de la modification	Date	Nom	Vérif.
 Matière:		Date de création: 02/07/2022	A4	Ech.: s/e
Plan n°: 57VD_092138_Clt				
Désignation:				
VIGILEX VD 920x1380				