

ATEX II GD - INERIS15ATEX0001X

Pstat : < 500 mbar

Pstat standard : 100 mbar +/-25% @22°C

Max vacuum : 50 mbar pour / for Pstat 100 mbar

Surface / Area: 2680 cm<sup>2</sup>

Kst : dp/dt < 500 bar/s

Kg : dp/dt < 130 bar/s


Pmax < 12 bar / Pred. max < 1.8 bar

- Inox 304L / stainless steel 1.4306

- Inox 316L / stainless steel 1.4404

- Joint / gasket EPDM Temp: -40...+80° C

- Joint / gasket SILICONE FDA Temp: -60...+200° C

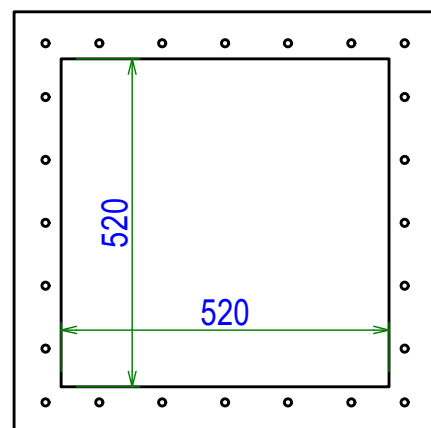

Poids unitaire / Unit weight : 3,447 kg

|   |                          |                                 |     |              |
|---|--------------------------|---------------------------------|-----|--------------|
| A   | Création                 | 07/04/2022                      | AV  | MJ           |
| Ind.                                      | Objet de la modification | Date                            | Nom | Vérif.       |
| <b>STIF</b>                               | Matière:                 | Date de création:<br>07/04/2022 | A4  | Ech.:<br>s/e |
| Plan n°: 57VL_052_Clt                     |                          |                                 |     |              |
| Désignation:<br><b>VIGILEX VL 520x520</b> |                          |                                 |     |              |